


Linear air pump 電磁式鼓風機
Built-In Type & Small Capacity

DM5 / 10 / 12

UL No. E257514










► Dimensions (mm) 外形尺寸 :

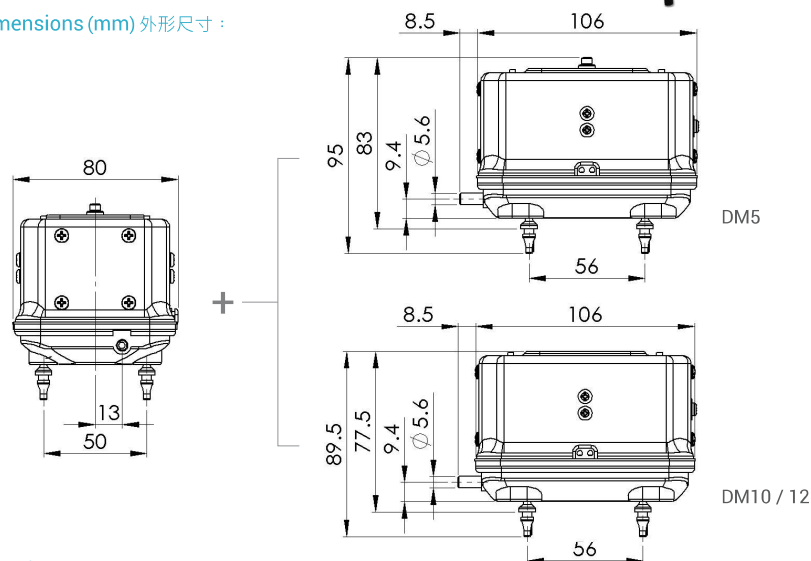

► Specifications 規格 :

Model 型號	Voltage 電壓 (VAC)	Frequency 頻率 (HZ)	Rated Pressure 額定壓力		Air Flow 風量		AMP 安培 (A)	Watt 瓦特 (w)	Noise 噪音 (dBA)	Weight 重量			
			kg/cm²	PSI	LPM	CFM				kg	lb		
DM5	110-120	60	0.04	0.57	10	0.35	0.12	9	34	0.75	1.65		
DM5	220-240	50	0.04	0.57	8	0.28	0.06	9					
DM5	12	60	0.04	0.57	10.5	0.37	1.15	8					
DM5	12	50	0.04	0.57	8.5	0.3	1.15	8					
DM5	24	60	0.04	0.57	10.5	0.37	0.57	8					
DM5	24	50	0.04	0.57	8.5	0.3	0.57	7.5					
DM10	110-120	60	0.1	1.42	10	0.35	0.09	8	40				
DM10	220-240	50	0.1	1.42	8	0.28	0.05	8					
DM10	12	60	0.1	1.42	10.5	0.37	1	9					
DM10	12	50	0.1	1.42	9.5	0.34	1	8					
DM10	24	60	0.1	1.42	10.5	0.37	0.51	9					
DM10	24	50	0.1	1.42	9	0.32	0.51	8					
DM10	12VDC	50/60	0.1	1.42	10	0.35	1.2	15					
DM12	220-240	50	0.1	1.42	11.5	0.41	0.09	14.8					
DM12	24	60	0.1	1.42	12	0.42	0.59	9					
DM12	24	50	0.1	1.42	12	0.42	0.59	9					

► Performance Curve 性能曲線 :

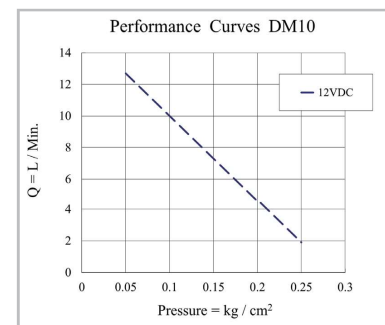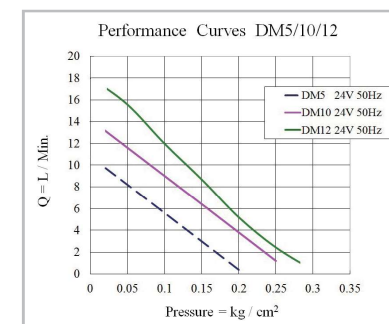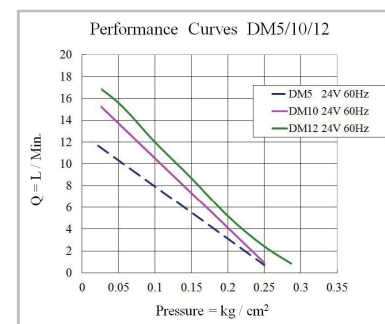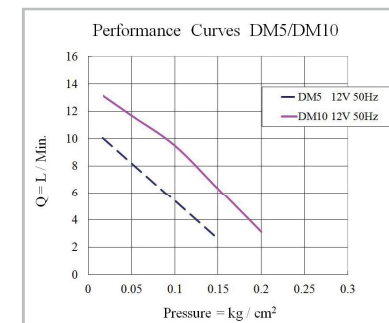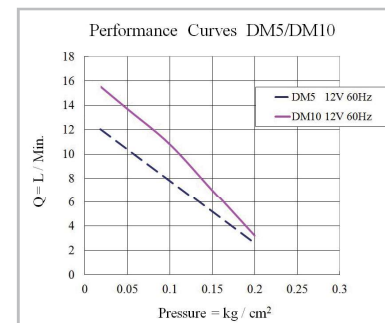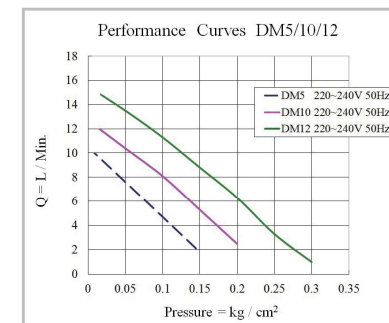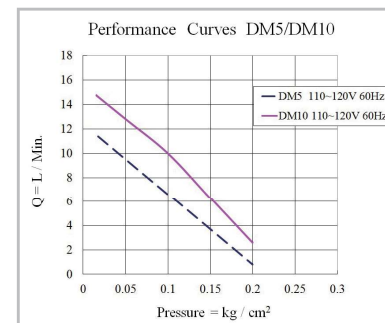

*The performance has $\pm 5\%$ allowance and all values are only for reference.

*The ambient temperature for linear air pumps is -10°C to 40°C .

*性能數據有 $\pm 5\%$ 的允許值，數據僅供參考。

*鼓風機可使用的環境溫度於 -10°C 到 40°C 。